

SR 細長型熱縮刀把

SLIM TYPE SHRINK FIT CHUCK



Balancing / 動平衡


Dimensions / 尺寸標示

G6.3

Max.25,000 RPM
Or U ≤ 1gmm

Option / 選配
G2.5

Max.25,000 RPM
Or U ≤ 1gmm

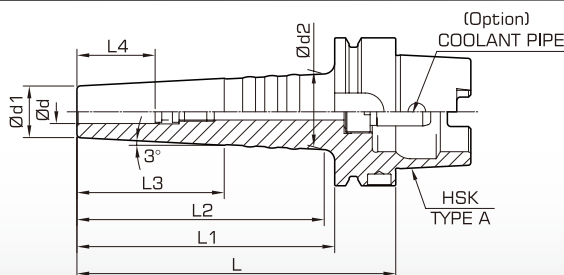

page.144



| Order No. 訂購編號 | | ød | ød1 | ød2 | L | L1 | L2 | L3 | Tool Clamping Depth L4 刀具夾持深度 | Screw 調整螺絲 |
|-------------------|----------|----|-----|------|-----|-------|-------|-----------|-------------------------------------|---------------|
| HSK50A | SR04-125 | 4 | 10 | 19.5 | 125 | 99 | 96.2 | 30 | min18 | - |
| | SR06-125 | 6 | 12 | 21.5 | 125 | 99 | 96.2 | 40 | 21.5~31.5 | HY06-M5 |
| | SR08-125 | 8 | 14 | 23.5 | 125 | 99 | 96.2 | 40 | 25.5~35.5 | HY08-M6 |
| | SR10-125 | 10 | 16 | 25.5 | 125 | 99 | 96.2 | 50 | 31.5~41.5 | HY08-M6 |
| HSK63A | SR04-120 | 4 | 10 | 18.8 | 120 | 94 | 89.3 | 30 | min18 | - |
| | SR04-150 | 4 | 10 | 21.8 | 150 | 124 | 119.3 | 30 | min18 | - |
| | SR06-120 | 6 | 12 | 20.8 | 120 | 94 | 89.3 | 40 | 21.5~31.5 | HY06-M5 |
| | SR06-150 | 6 | 12 | 23.8 | 150 | 124 | 119.3 | 40 | 21.5~31.5 | HY06-M5 |
| | SR08-120 | 8 | 14 | 22.8 | 120 | 94 | 89.3 | 40 | 25.5~35.5 | HY08-M6 |
| | SR08-150 | 8 | 14 | 25.8 | 150 | 124 | 119.3 | 40 | 25.5~35.5 | HY08-M6 |
| | SR10-120 | 10 | 16 | 24.9 | 120 | 94 | 89.3 | 50 | 31.5~41.5 | HY08-M6 |
| | SR10-150 | 10 | 16 | 27.9 | 150 | 124 | 119.3 | 50 | 31.5~41.5 | HY08-M6 |
| | SR12-120 | 12 | 18 | 27 | 120 | 94 | 91.2 | 55 | 36.5~46.5 | HY14-M8 |
| SR12-150 | 12 | 18 | 30 | 150 | 124 | 121.2 | 55 | 36.5~46.5 | HY14-M8 | |
| HSK100A | SR04-165 | 4 | 10 | 22 | 165 | 136 | 121.8 | 30 | min18 | - |
| | SR06-165 | 6 | 12 | 24.1 | 165 | 136 | 121.8 | 40 | 21.5~31.5 | HY06-M5 |
| | SR08-165 | 8 | 14 | 26.1 | 165 | 136 | 121.8 | 40 | 25.5~35.5 | HY08-M6 |
| | SR10-165 | 10 | 16 | 28.1 | 165 | 136 | 121.8 | 50 | 31.5~41.5 | HY08-M6 |
| | SR12-165 | 12 | 18 | 30.1 | 165 | 136 | 121.8 | 55 | 36.5~46.5 | HY14-M8 |

Remarks / 備註

- 直接夾持精度 Direct Clamping
- 刀具柄徑公差 h6(h6 Tooling Diameter Tolerance)

Applications / 應用



Drilling
鑽孔



Reaming
銜孔



Endmilling
銑削



Mini Diameter
小徑加工